

Gallium Nitride E-Mode HEMT GS700ETC360A: 360mΩ, 700V



Description

This is a 700V GaN-on-Si enhancement-mode power transistor in TO252 package. The properties of GaN allow for high current, high breakdown voltage and high switching frequency. The DFN8x8 package offers low parasitic inductance, strong heat dissipation capability and high solderability, which make GaN apply better to consumer and industrial applications.

Features

- Ultra-low FOM
- Ultra-high switching frequency
- Reverse current capability
- Zero reverse recovery loss
- Monolithic integrated ESD protection
- RoHS, Pb-free, REACH-compliant

Applications

- AC/DC converters
- DC/DC converters
- Bridgeless totem pole PFC
- Fast chargers
- Power adapters
- LED lighting drivers
- Wireless power transfer
- Laser drivers
- TV display

Table 1 Key Performance Parameters at T_J = 25 °C

Parameters	Values	Units
V _{DS, max}	700	V
R _{DS(on), max}	500	mΩ
Q _G	1.4	nC
I _{D, Pulse}	9	A
Q _{oss @ 400 V}	8.9	nC



Table 2 Pin Information

Gate	Source	Drain
1	2	3

Table 3 Ordering Information

Ordering Code	Package	Product code	MOQ
GS700EWF360G0	TO252	GS700ETC360A	3wk/reel

Table of contents

Features.....	1
Applications.	1
Table of contents.....	2
1 Maximum ratings.....	3
2 Thermal characteristics.....	3
3 Electrical characteristics.....	4
4 Electrical characteristics diagrams.....	6
5 Package outlines.....	12
6 Reel Information.....	12
7 Revision history.....	13

1 Maximum ratings

at $T_j = 25\text{ }^{\circ}\text{C}$ unless otherwise specified. Continuous application of maximum ratings can deteriorate transistor lifetime.

Table 3 Maximum rating

Parameters	Symbols	Values	Units	Notes/Test Conditions
Drain-source voltage	$V_{DS, \max}$	700	V	$V_{GS} = 0\text{ V}$ $T_j = -55^{\circ}\text{C}$ to 150°C
Drain-source voltage transient ¹	$V_{DS, \text{transient}}$	800	V	$V_{GS} = 0\text{ V}$
Continuous current, drain-source	I_D	5	A	$T_c = 25\text{ }^{\circ}\text{C}$
Pulsed current, drain-source ²	$I_{D, \text{pulse}}$	9	A	$T_c = 25\text{ }^{\circ}\text{C}$; $V_G = 6\text{ V}$
Pulsed current, drain-source ²	$I_{D, \text{pulse}}$	4	A	$T_c = 125\text{ }^{\circ}\text{C}$; $V_G = 6\text{ V}$
Gate-source voltage, continuous	V_{GS}	-1 to +7	V	$T_j = -55\text{ }^{\circ}\text{C}$ to $150\text{ }^{\circ}\text{C}$
Gate-source voltage, pulsed	$V_{GS, \text{pulse}}$	-20 to +10	V	$T_j = -55\text{ }^{\circ}\text{C}$ to $150\text{ }^{\circ}\text{C}$; $t_{\text{Pulse}} = 50\text{ ns}$, $f = 100\text{ kHz}$; open drain
Power dissipation	P_{tot}	40	W	$T_c = 25\text{ }^{\circ}\text{C}$
Operating temperature	T_j	-55 to +150	$^{\circ}\text{C}$	
Storage temperature	T_{stg}	-55 to +150	$^{\circ}\text{C}$	

1. $V_{DS, \text{transient}}$ is intended for surge rating during non-repetitive events, $t_{\text{Pulse}} < 1\text{ }\mu\text{s}$.

2. Pulse width = 10 μs .

2 Thermal characteristics

Table 4 Thermal characteristics

Parameters	Symbols	Values			Units	Notes/Test Conditions
		Min.	Typ.	Max.		
Thermal resistance, junction-ambient	R_{thJA}		80		$^{\circ}\text{C/W}$	
Thermal resistance, junction-case	R_{thJC}	-	3.2	-	$^{\circ}\text{C/W}$	
Reflow soldering temperature	T_{sold}	-	-	260	$^{\circ}\text{C}$	MSL3

3 Electrical characteristics

at $T_j = 25\text{ }^{\circ}\text{C}$, unless specified otherwise.

Table 5 Static characteristics

Parameters	Symbols	Values			Units	Notes/Test Conditions
		Min.	Typ.	Max.		
Gate threshold voltage	$V_{GS(TH)}$	1.2	1.6	2.5	V	$I_D = 4\text{ mA}; V_{DS} = V_{GS}; T_j = 25\text{ }^{\circ}\text{C}$
		-	2	-		$I_D = 4\text{ mA}; V_{DS} = V_{GS}; T_j = 150\text{ }^{\circ}\text{C}$
Drain-source leakage current	I_{DSS}	-	0.01	0.5	μA	$V_{DS} = 700\text{ V}; V_{GS} = 0\text{ V}; T_j = 25\text{ }^{\circ}\text{C}$
		-	3	-		$V_{DS} = 700\text{ V}; V_{GS} = 0\text{ V}; T_j = 150\text{ }^{\circ}\text{C}$
Gate-source leakage current	I_{GSS}	-	0.7		μA	$V_{GS} = 6\text{ V}; V_{DS} = 0\text{ V}$
Drain-source on-state resistance	$R_{DS(on)}$	-	360	500	$\text{m}\Omega$	$V_{GS} = 6\text{ V}; I_D = 2\text{ A}; T_j = 25\text{ }^{\circ}\text{C}$
		-	940	-	$\text{m}\Omega$	$V_{GS} = 6\text{ V}; I_D = 2\text{ A}; T_j = 150\text{ }^{\circ}\text{C}$
Gate resistance	R_G	-	13.5	-	Ω	$f = 5\text{ MHz}; \text{open drain}$

Table 6 Dynamic characteristics

Parameters	Symbols	Values			Units	Notes/Test Conditions
		Min.	Typ.	Max.		
Input capacitance	C_{iss}	-	37	-	pF	$V_{GS} = 0\text{ V}; V_{DS} = 400\text{ V}; f = 100\text{ KHz}$
Output capacitance	C_{oss}	-	13	-	pF	$V_{GS} = 0\text{ V}; V_{DS} = 400\text{ V}; f = 100\text{ KHz}$
Reverse transfer capacitance	C_{rss}	-	0.01	-	pF	$V_{GS} = 0\text{ V}; V_{DS} = 400\text{ V}; f = 100\text{ KHz}$
Effective output capacitance, energy related ¹	$C_{o(er)}$	-	16	-	pF	$V_{GS} = 0\text{ V}; V_{DS} = 0\text{ to }400\text{ V}$
Effective output capacitance, time related ²	$C_{o(tr)}$	-	28	-	pF	$V_{GS} = 0\text{ V}; V_{DS} = 0\text{ to }400\text{ V}$
Output charge	Q_{oss}	-	8.9	-	nC	$V_{GS} = 0\text{ V}; V_{DS} = 0\text{ to }400\text{ V}$
Turn-on delay time	$t_{d(on)}$	-	3	-	ns	$V_{DS} = 400\text{ V}; I_D = 4\text{ A}; L = 318\text{ }\mu\text{H};$ $V_{GS} = 6\text{ V}; R_{on} = 10\text{ }\Omega; R_{off} = 2\text{ }\Omega$
Turn-off delay time	$t_{d(off)}$	-	6	-	ns	
Rise time	t_r	-	5	-	ns	
Fall time	t_f	-	9	-	ns	

1. $C_{o(er)}$ is the fixed capacitance that gives the same stored energy as C_{oss} while V_{DS} is rising from 0 to 400 V.

2. $C_{o(tr)}$ is the fixed capacitance that gives the same charging time as C_{oss} while V_{DS} is rising from 0 to 400 V.

Table 7 Gate charge characteristics

Parameters	Symbols	Values			Units	Notes/Test Conditions
		Min.	Typ.	Max.		
Gate charge	Q_G	-	1.4	-	nC	$V_{GS} = 0 \text{ to } 6 \text{ V}; V_{DS} = 400 \text{ V}; I_D = 2 \text{ A}$
Gate-source charge	Q_{GS}	-	0.3	-	nC	
Gate-drain charge	Q_{GD}	-	0.8	-	nC	
Gate plateau voltage	V_{plat}	-	2.5	-	V	$V_{DS} = 400 \text{ V}; I_D = 2 \text{ A}$

Table 8 Reverse conduction characteristics

Parameters	Symbols	Values			Units	Notes/Test Conditions
		Min.	Typ.	Max.		
Source-drain reverse voltage	V_{SD}	-	4.4	-	V	$V_{GS} = 0 \text{ V}; I_{SD} = 2 \text{ A}$
Pulsed current, reverse	$I_{S, pulse}$	-	-	9	A	$V_{GS} = 6 \text{ V}$
Reverse recovery charge ¹	Q_{rr}	-	0	-	nC	$I_{SD} = 2 \text{ A}; V_{DS} = 400 \text{ V}$
Reverse recovery time	t_{rr}	-	0	-	ns	
Peak reverse recovery current	I_{rm}	-	0	-	A	

1. Excluding Q_{oss}

4 Electrical characteristics diagrams

at $T_j = 25\text{ }^{\circ}\text{C}$, unless specified otherwise.

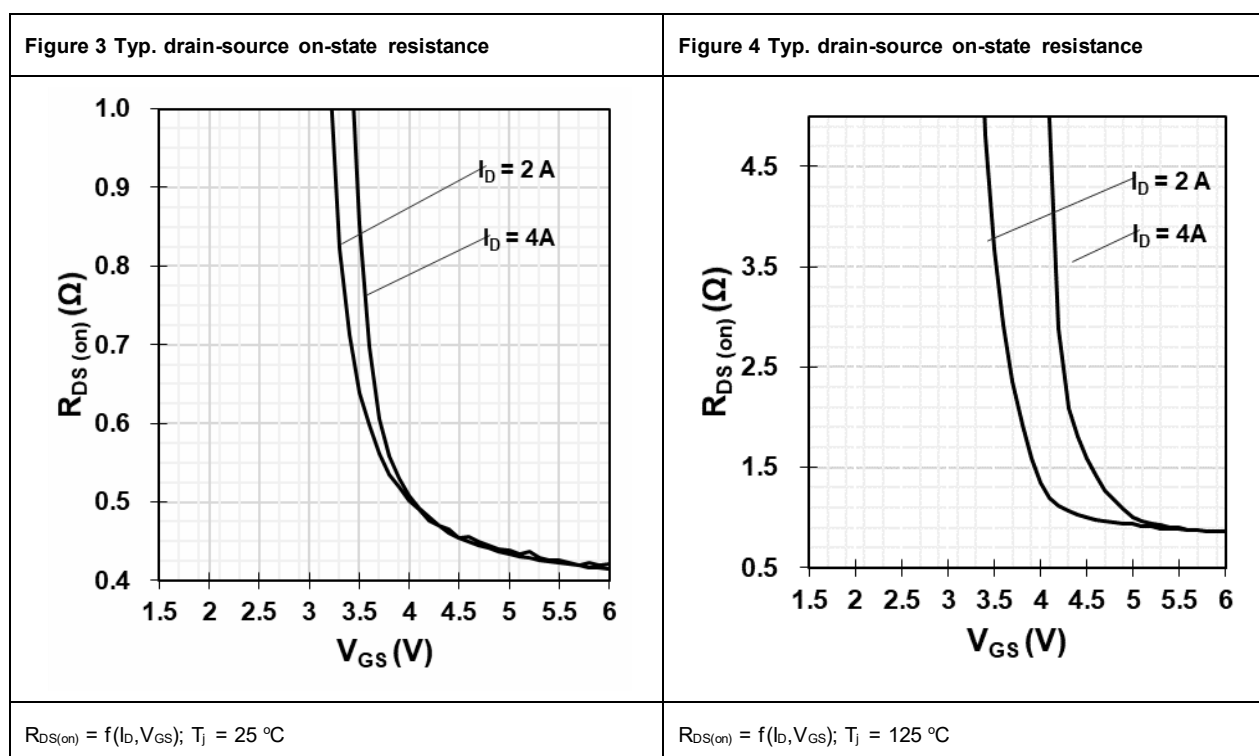
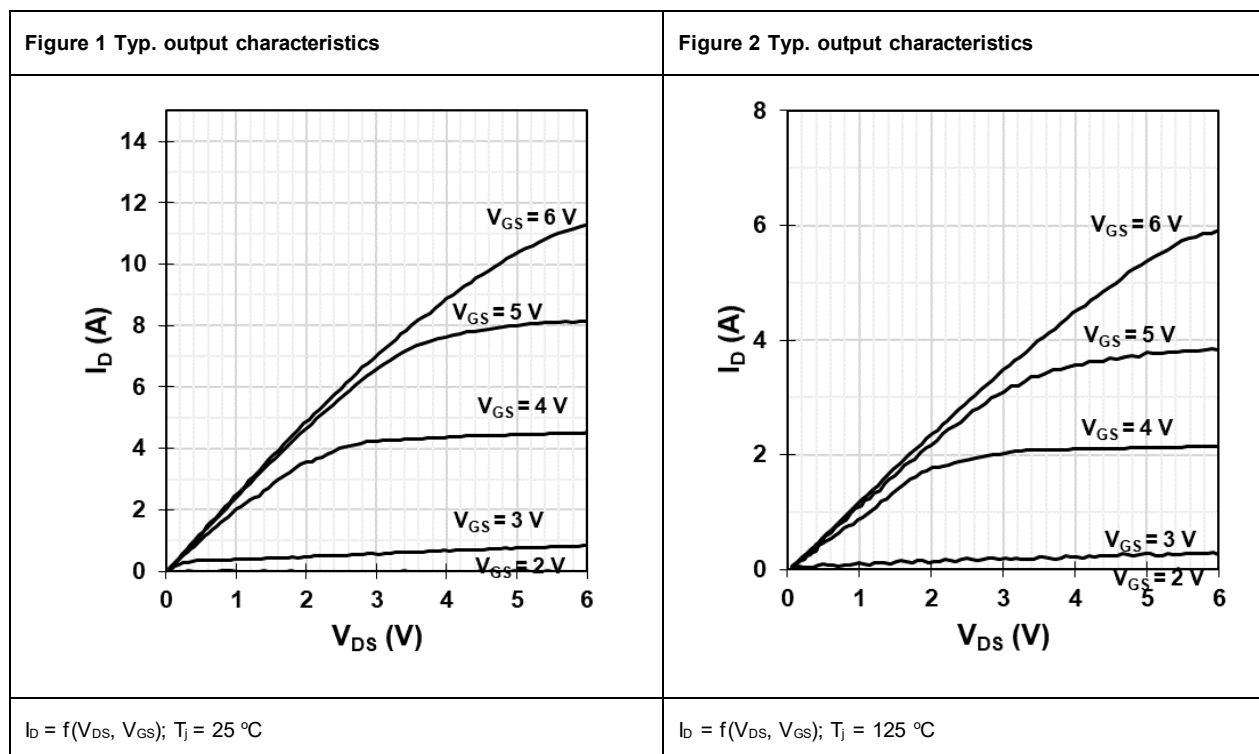
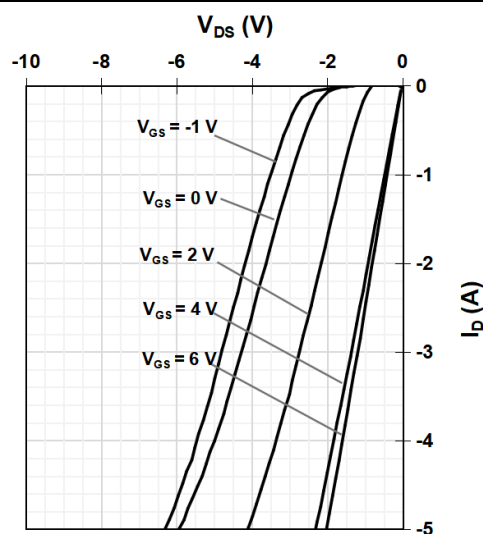
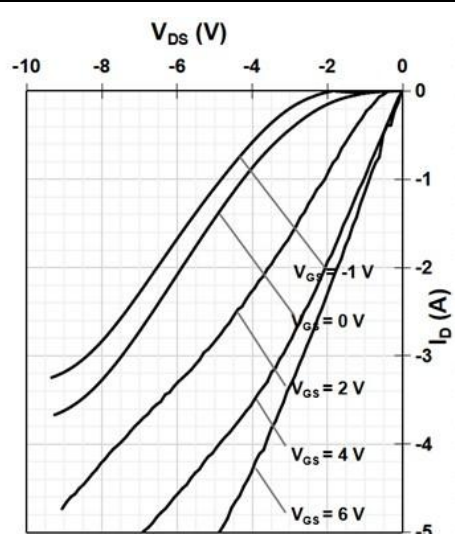
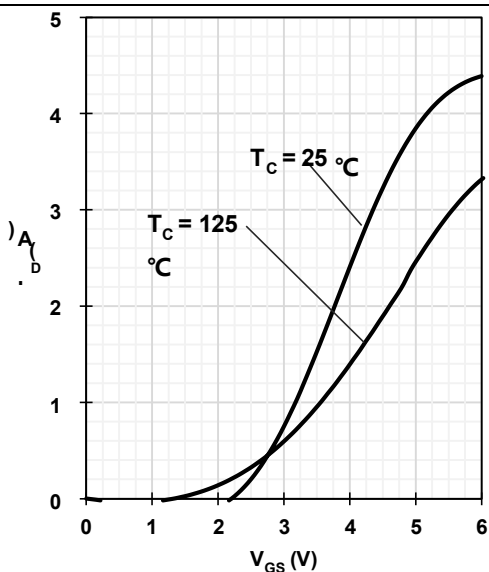


Figure 5 Typ. channel reverse characteristics


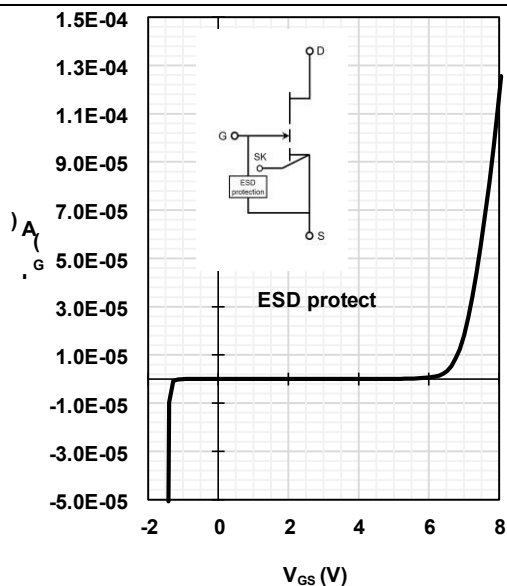
$$I_D = f(V_{DS}, V_{GS}); T_J = 25\text{ }^{\circ}\text{C}$$

Figure 6 Typ. channel reverse characteristics


$$I_D = f(V_{DS}, V_{GS}); T_J = 125\text{ }^{\circ}\text{C}$$

Figure 7 Typ. transfer characteristics


$$I_D = f(V_{GS}); V_{DS} = 3\text{ V}$$

Figure 8 Typ. gate-to-source leakage


$$I_G = f(V_{GS}); V_D = \text{open}$$

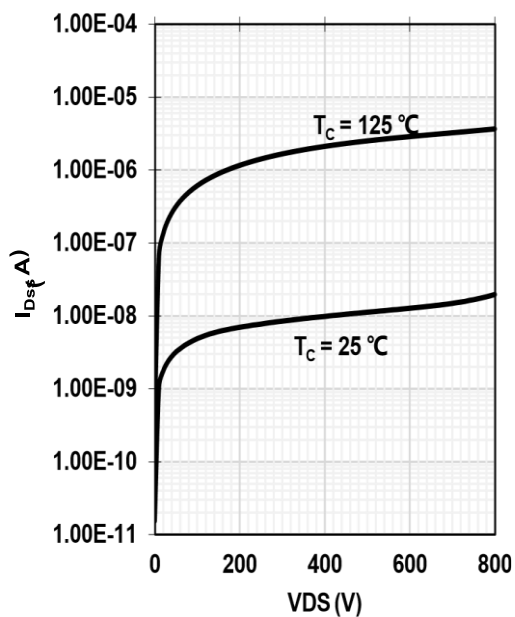
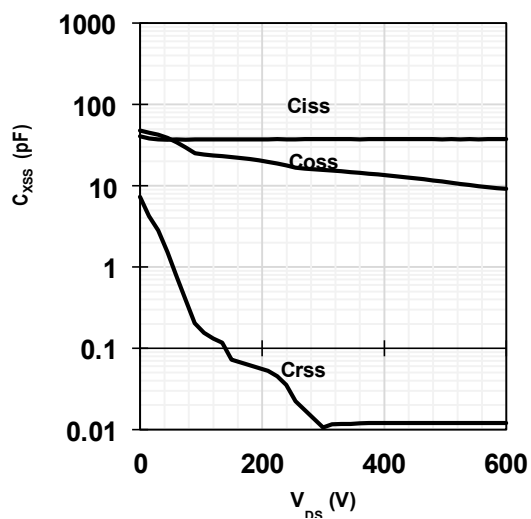
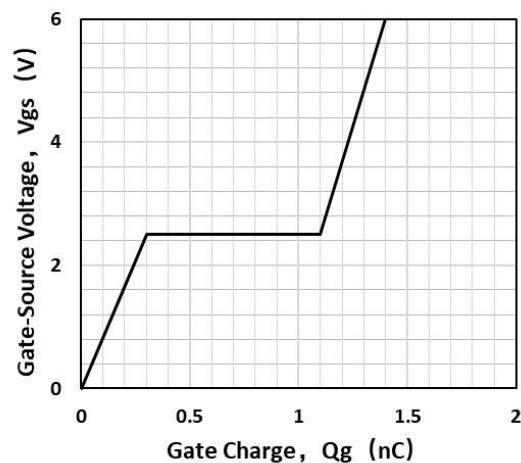
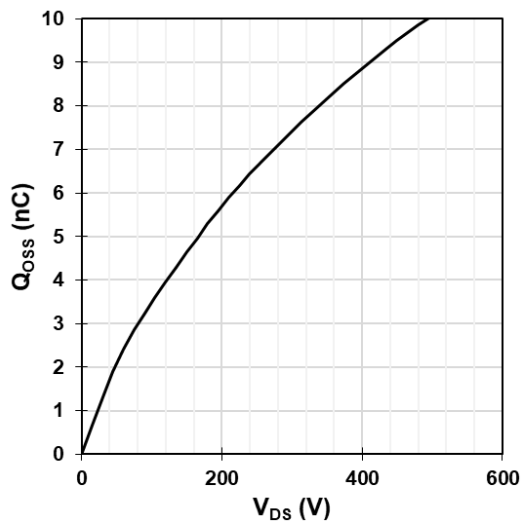
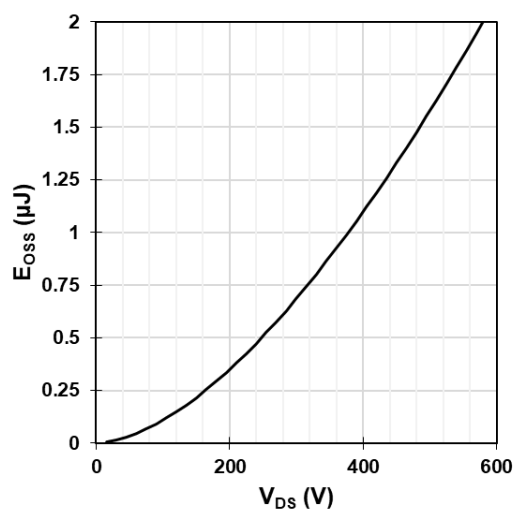
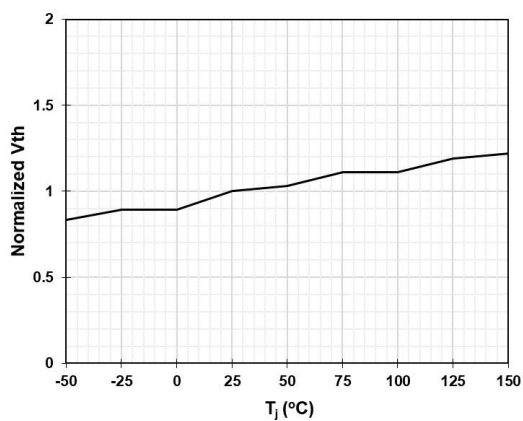
Figure 9 Drain-source leakage characteristics

 $I_{dss} = f(V_{ds}); V_{gs} = 0V$
Figure 10 Typ. capacitances

 $C_{xss} = f(V_{DS}); \text{Freq.} = 100\text{kHz}$
Figure 11 Typ. gate charge

 $V_{GS} = f(Q_G); V_{DS} = 400V; I_D = 2A$

Figure 12 Typ. output charge


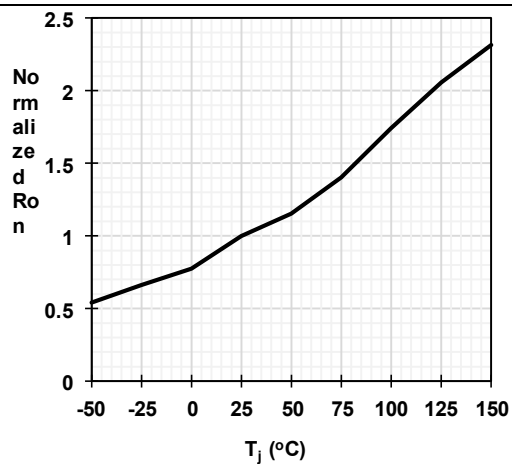
$$Q_{oss} = f(V_{DS}); \text{Freq.} = 100\text{kHz}$$

Figure 13 Typ. C_{oss} stored energy


$$E_{oss} = f(V_{DS}); \text{Freq.} = 100\text{kHz}$$

Figure 14 Gate threshold voltage


$$V_{GS(TH)} = f(T_j); V_{GS} = V_{DS}; I_D = 16 \text{ mA}$$

Figure 15 Drain-source on-state resistance


$$R_{DS(on)} = f(T_j); I_D = 5 \text{ A}; V_{GS} = 6 \text{ V}$$

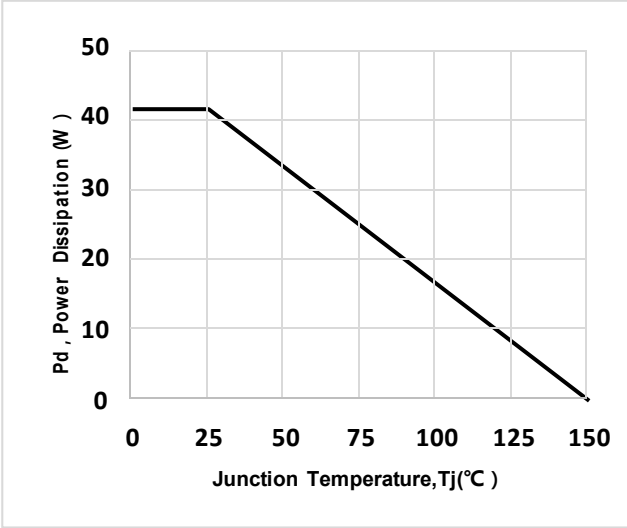
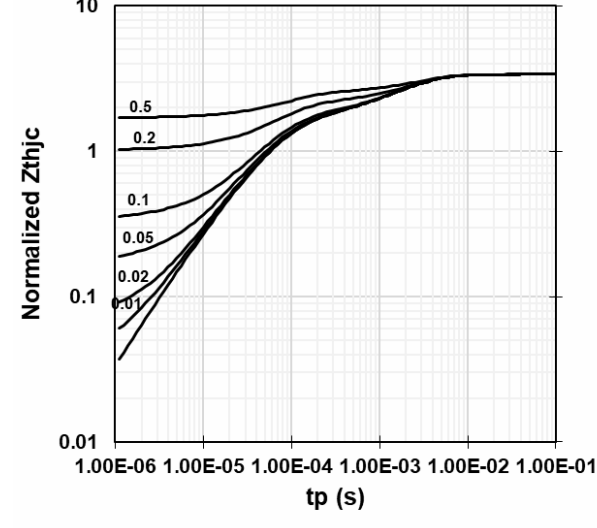
Figure 16 Power dissipation	Figure 17 Max.transient thermal impedance
	
$P_{tot} = f(T_c)$	$Z_{thjc} = f(t_p, D)$

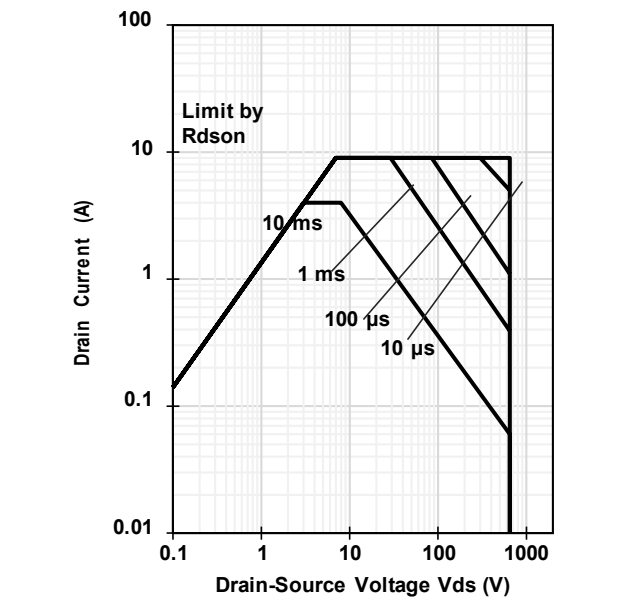
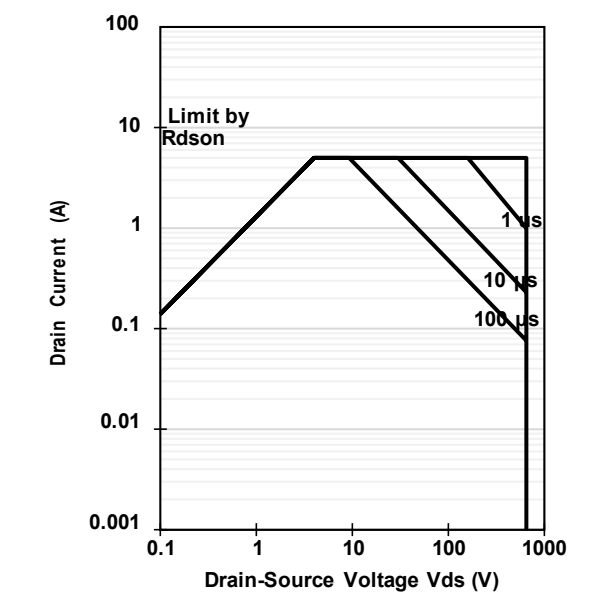
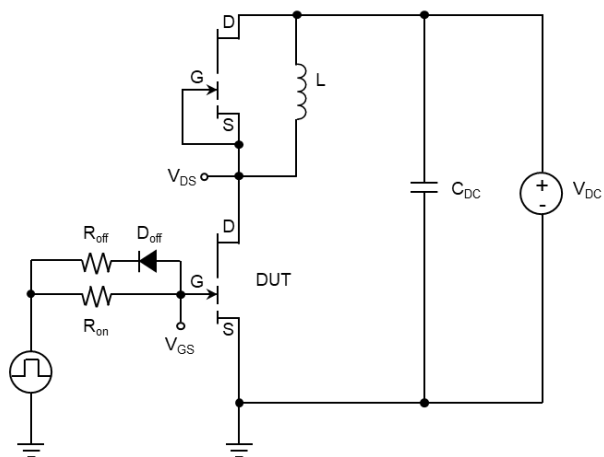
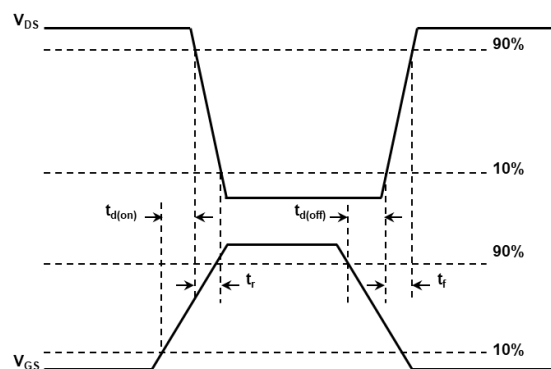
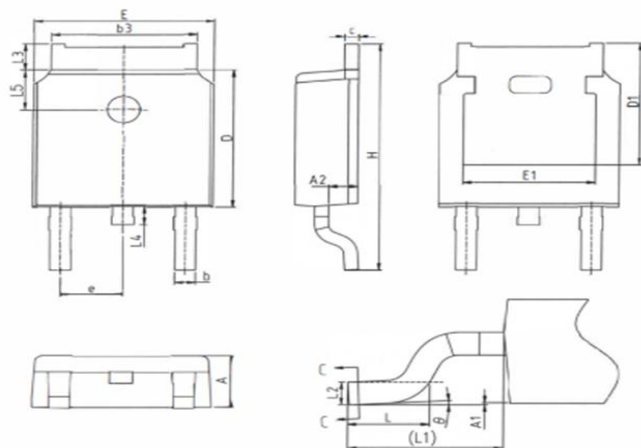
Figure 18 Safe Operation Area	Figure 19 Safe Operation Area
	
$I_d = f(V_{ds}); T_c = 25^\circ\text{C}$	$I_d = f(V_{ds}); T_c = 125^\circ\text{C}$

Figure 20 Switching time test circuit


$V_{DS} = 400 \text{ V}$, $I_D = 6 \text{ A}$, $L = 318 \text{ } \mu\text{H}$, $V_{GS} = 6 \text{ V}$,
 $R_{on} = 10 \text{ } \Omega$, $R_{off} = 2 \text{ } \Omega$

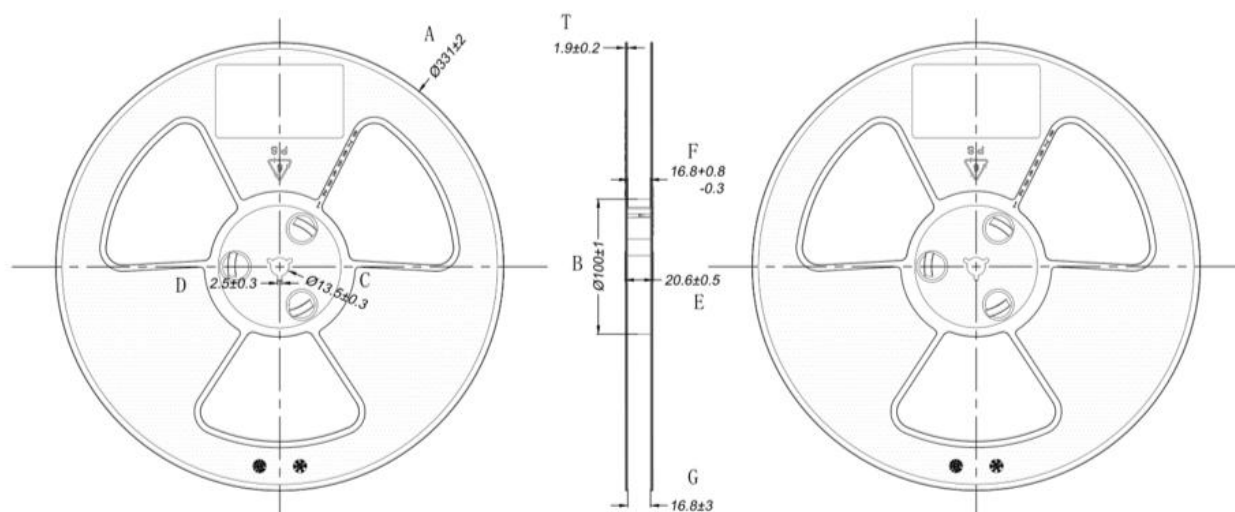
Figure 21 Typ. switching time waveforms


5 Package outlines



SYMBOL	MM			SYMBOL	MM		
	MIN	NOM	MAX		MIN	NOM	MAX
A	2.20	2.30	2.40	e	2.286BSC		
A1	0.00	-	0.13	H	9.40	10.10	10.50
A2	0.92	1.07	1.17	L	1.38	1.50	1.75
b	0.63	0.78	0.90	L1	2.90REF		
b3	5.10	5.33	5.46	L2	0.51BSC		
c	0.43	0.53	0.61	L3	0.88	-	1.28
D	5.98	6.10	6.22	L4	0.50	-	1.00
D1	5.30REF			L5	1.65	1.80	1.95
E	6.40	6.60	6.73	θ	0°	-	8°
E1	4.83REF						

6 Reel Information



A ± 2	B ± 1	C ± 0.3	D ± 0.3	E ± 0.5	$F^{+0.8}_{-0.3}$	G ± 3	T ± 0.2
φ 331	φ 100	φ 13.5	2.5	20.6	16.8	16.8	1.9

7 Revision history

Major changes since the last revision

Revision	Date	Description of changes
1.0	2025-01-23	1.0 version release
2.0	2025-04-25	Implemented the Reel Information and updated the Electrical Cz Data and Diagram